

LC-DD1LCM10-S10 10RELAY DALI BROADCAST LCM-WHITE

Key Features


Our ecoLUX DALI Broadcast Lighting Control Module controls up to 10 channels, all of which can be programmed for: DALI, DSI, 0-10, 1-10 or switching. It also has an integral emergency relay. The enclosure has been designed for ease of installation with 'Z' bold fixing rails on the rear. All the connections to the unit can also be pre-wired before installation. The DALI Broadcast LCM has:

- 10x 6 pole sockets to connect fittings
- 2 internal hardwired CAN connections
- 3 x RJ12 for CAN PIRs and Scene Set Plates
- 10-pin hardwired connector for 8 volt-free inputs
- Internal plugs for network booster for long networks

A removable memory module facilitates fast configuration of a replacement LCM should that be needed. In other words, should an LCM need to be replaced for any reason, no reprogramming is necessary, simply remove the memory module and reinsert it into the new unit.



Product Dimensions (mm)

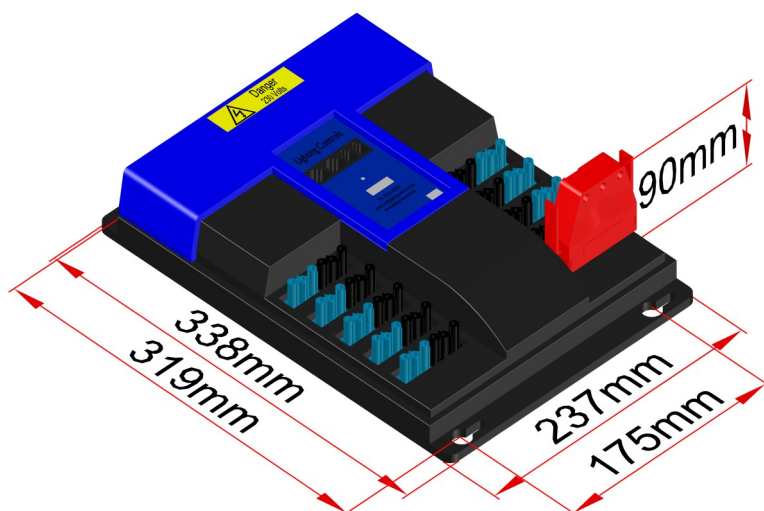

Network Isolation

This LCM has two isolated networks. The field wiring CAN bus which networks the LCMs is isolated from the peripheral bus which connects PIRs and scene plates. Should a wiring problem occur on one LCM peripheral, it will not affect other LCMs. Should field wiring become compromised then LCMs will stand alone and continue to function.

Power

The LCM is not powered from the bus and requires a permanent mains supply from the relevant lighting circuit.

Max no. of Scene Plates/ PIRs	10
Inputs	8 clean contact
Field comms	CAN BUS, 2 internal screw terminals
Local comms	CAN BUS 3 x RJ12 pre terminated
Luminaire connection	6 way, switched Live (ports 6-10), Earth, Neutral, emergency Live, Dim- Dim+
Configuration memory (removable)	256K (non-volatile)

Supply voltage	90-240 V AC 50Hz
Power consumption	Off load - 1.2 watts All channels on - 4 watts
Internal fuse	1AT
Load (total)	10A
Load per channel	6A
Case material	Flame retardant ABS
Operating temperature	-10 to +50°C
Max Humidity	90% RH non-condensing

IMPORTANT: Information contained in this datasheet is subject to change at any time without notice. Installation guides are available on our website (www.lightingcontrols.ltd.uk) or call us on 01252 470 027.