

3 POLE FLYING TEE – POWER



Our armoured Power Tee is designed to provide a power in and out facility enabling low level power circuits to be connected in series. The tee would be fitted to the FCU or independently fixed in the ceiling void. The tees can be free issued to a third party luminaire manufacturer for off site assembly .


Tees can be supplied either with suitably sized 3 or 4 core LSOH flexible cable of flexible metal conduit containing 3 or 4 core LSOH cables. An integral bus version is available but only as a 3 core system plus 2 poles for bus.

Part Number:
LC-AWFT33401
LC-AWFT33403


1m drop
3m drop



ECOLUX DATASHEET

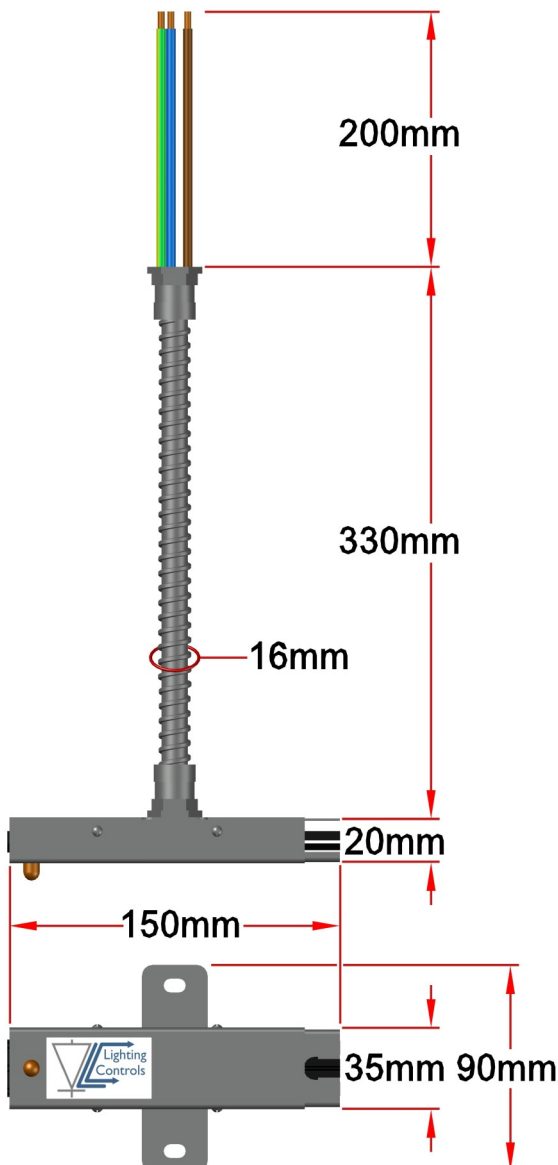

- Flexible conduit - Galvanised Steel to BSEN500086
- Current Rating - up to 25A
- Retention Force - >120N with Locking Device
- Through Resistance - 20A and 32A systems –0.5m ohms between male and female contacts
- Connectors - Polyamide 6./6 UL94-VO Halogen Free

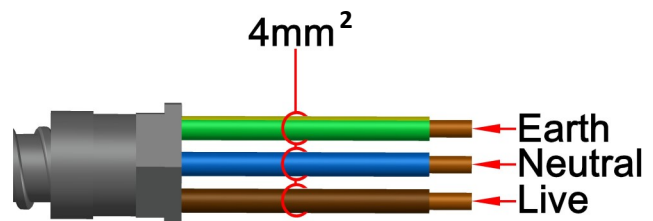

Metal Housings	Bright Spangled Galv BS10142:2000
Protection Class	IP20
Conduit	Galv-BSEN50086
Current Rating	25A
Voltage Rating	400V/6kV/3.1IEC60664
Manufacturing British Standard	BS 8488

IMPORTANT: Information contained in this datasheet is subject to change at any time without notice.
 Installation guides are available on our website (www.lightingcontrols.ltd.uk) or call us on 01252 470 027.