ecolux DATASHEET

LC-AWSL33401/53201 3 POLE POWER /5 POLE LIGHTING STARTER CABLE

Key Features

A range of armoured Starter Cables designed to provide the start of a power and data supply to a circuit not connected to a MDB. They are a cost effective approach for single circuit supplies on a radial circuit.

Leads are supplied as pre-wired female to free end in various lead lengths to suit the installation and are supplied with a 16mm conduit with glands to the metal housing (female), the other to a free end.

4.0mm mains for 3 pole power starter cable

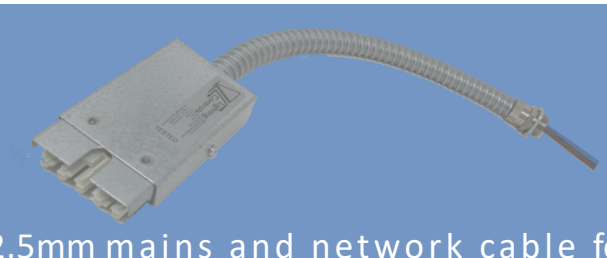

2.5mm mains and network cable for 5 pole lighting starter cable

3 Pole Power Starter Cable

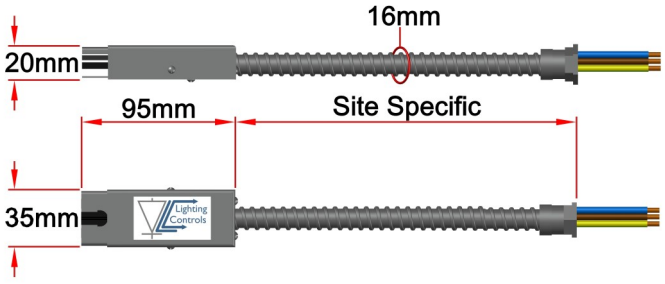

5 Pole Lighting Starter Cable

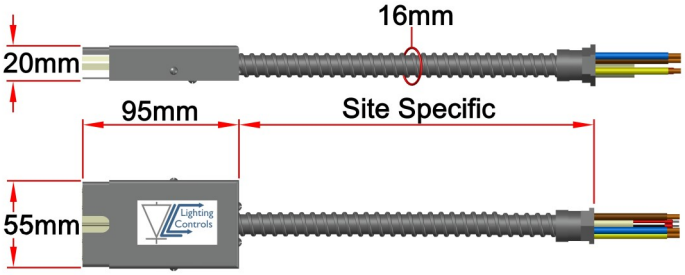

CABLE DIMENSIONS 3 POLE POWER

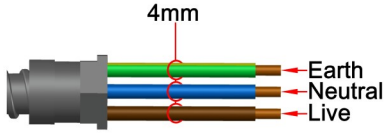

CABLE DIMENSIONS 5 POLE LIGHTING

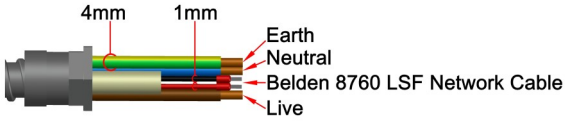

Metal Housings	Bright Spangled Galv
Protection Class	IP20
Conduit	Galv-BSEN50086
Current Rating	25A
Voltage Rating	400V/6kV/3.1IEC60664
Manufacturing British Standard	BS 8488

IMPORTANT: Information contained in this datasheet is subject to change at any time without notice. Installation guides are available on our website (www.lightingcontrols.ltd.uk) or call us on 01252 470 027.