

5 POLE FLYING TEE - LIGHTING



Our armoured Lighting Tee is designed to provide a power and data in and out facility enabling lighting control modules, light fittings and other equipment to be connected in series. The flying tee would be fitted to our LCM, or supplied to a third party luminaire manufacturer for connection to their fitting. Our lighting tee can be supplied with any drop length.

Tees can be supplied either with suitably sized 3 or 4 core LSOH flexible cable of flexible metal conduit containing 3 or 4 core LSOH cables. An integral bus version is available but only as a 3 core system plus 2 poles for bus.

Part Number:

LC-AWFT532300CL/BS


300mm drop

LC-AWFT532500CL/BS


500mm drop



ECOLUX DATASHEET

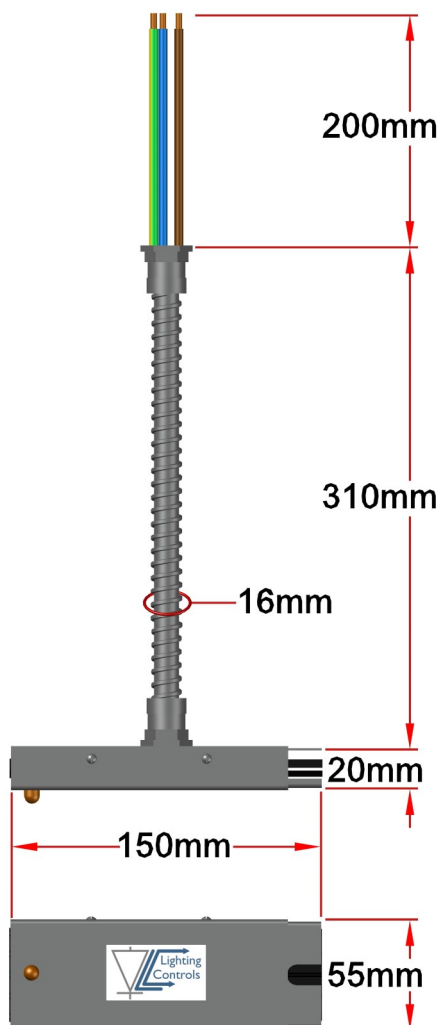

- Network Cable - Beldon 8760 LSF
- Cable - BASEC approved BS7211 LSOH 6491B
- Conduit- Galvanised Steel to BSEN50086
- Retention Force - >120N with locking device
- Connectors - Polyamide 6./6 UL94-VO Halogen Free

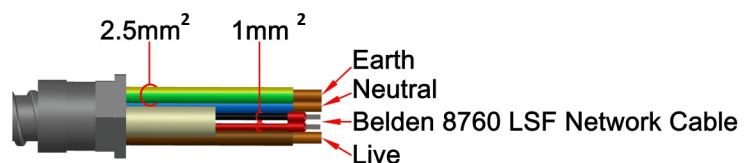

| | |
|--------------------------------|--------------------------------------|
| Metal Housings | Bright Spangled Galv BS10142:2000 |
| Protection Class | IP20 |
| Conduit | Galv-BSEN50086 |
| Current Rating | 25A |
| Voltage Rating | 400V/6kV/3.1IEC60664 |
| Manufacturing British Standard | BS 8488 |

IMPORTANT: Information contained in this datasheet is subject to change at any time without notice.
Installation guides are available on our website (www.lightingcontrols.ltd.uk) or call us on 01252 470 027.